



HELIENE

60MBLK HOME PV

60-CELL MONOCRYSTALLINE MODULE

310 Wp

MAX POWER OUTPUT

18.8%

MAX EFFICIENCY

10 YEAR

PRODUCT WARRANTY

25 YEAR

LINEAR PERFORMANCE GUARANTEE

HELIENE INC. IS A PREMIER SOLAR MODULE MANUFACTURER, SERVICING THE GROWING SOLAR ENERGY MARKETS OF NORTH AMERICA.

COMBINING PROVEN EUROPEAN TECHNOLOGY WITH NORTH AMERICAN INGENUITY ALLOWS HELIENE TO MAKE A REAL COMMITMENT IN PROVIDING SMARTER ENERGY CHOICES FOR THE FUTURE.

HELIENE
www.heliene.com



GUARANTEED POSITIVE POWER SORTING: [-0 : +4.99 WP]



AVAILABLE IN 1000V OR 1500V SYSTEM VOLTAGE RATING




MANUFACTURED FOLLOWING INTERNATIONAL QUALITY SYSTEM STANDARDS: ISO9001




H-BLACK INTEGRATION AVAILABLE (ALL-BLACK MODULE)

LINEAR PERFORMANCE GUARANTEE



10 YEAR WORKMANSHIP WARRANTY • 25 YEAR LINEAR PERFORMANCE GUARANTEE

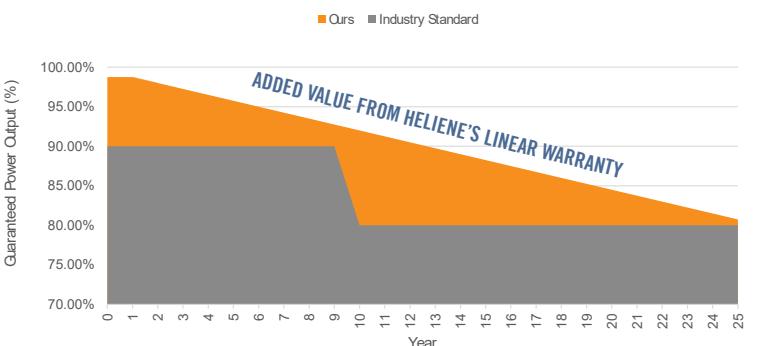

DIMENSIONS FOR 60M HOME PV SERIES

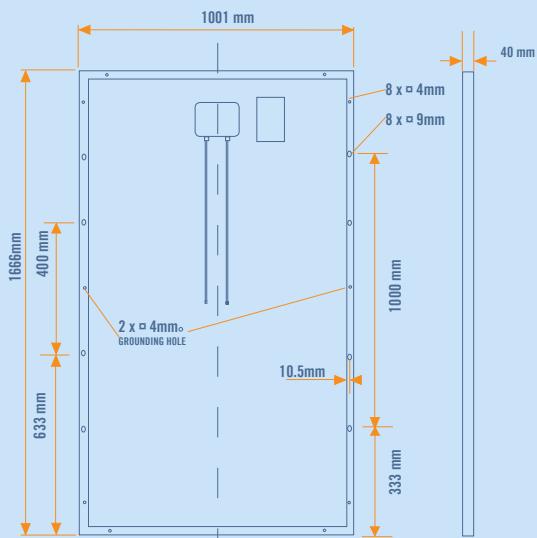

I-V CURVE FOR HELIENE 60M HOME PV SERIES

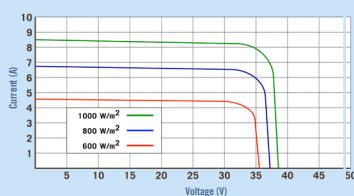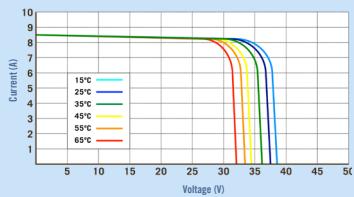

CERTIFICATIONS



ELECTRICAL DATA (STC)

Peak Rated Power	P_{mpp} (W)	310	305	300	295
Maximum Power Voltage	V_{mpp} (V)	33.44	34.14	33.72	33.42
Maximum Power Current	I_{mpp} (A)	9.66	9.62	9.56	9.53
Open Circuit Voltage	V_{oc} (V)	40.13	40.08	39.63	39.22
Short Circuit Current	I_{sc} (A)	10.22	10.17	10.10	10.09
Module Efficiency *	Eff (%)	18.78	18.48	18.18	17.88
Maximum Series Fuse Rating	MF (A)	20	20	20	20
Power Output Tolerance		[-0, +4.99] Wp			

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C

* Calculated using maximum power based on full positive output tolerance [-0, +4.99] Wp

MECHANICAL DATA

Dimensions (L x W x D)	1666 x 1001 x 40 mm (65.5 x 39.4 x 1.6 inch)
Weight*	22 kg (48.5 lbs)
Output Cables	1.0 m (39.4 inch) symmetrical cables with MC4 type connectors
Junction Box	IP-67 rated with bypass diodes
Frame	Double webbed 15 micron anodized aluminum alloy
Front Glass	Low-iron content, high-transmission PV solar glass
Solar Cells	60 Monocrystalline cells (159 x 159 mm)

* Calculated using 3.2mm PV glass, if 4mm profile is requested weight load will vary

CERTIFICATIONS

UL Certification	ULC/ORD-C1703-1, UL1703
IEC Certification	Optional

All Heliene modules are certified under the California Energy Commission (CEC) Listing Report

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)
Temperature Coefficient of P_{max}	-0.38%/°C
Temperature Coefficient of V_{oc}	-0.36%/°C
Temperature Coefficient of I_{sc}	0.07%/°C

PACKAGING CONFIGURATION

Modules per box:	26 pieces
Modules per 53' trailer:	936 pieces

MAXIMUM RATINGS

Operational Temperature	-40°C - +85°C
Max System Voltage	1000V (*1500V) *Optional

WARRANTY

10 Year Manufacturer's Workmanship Warranty

25 Year Linear Power Guarantee

(Refer to product warranty page for details)

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT. Specifications included in this datasheet are subject to change without notice.

