

A

B

C

D

E

F

G

H

www.jinkosolar.com


# Tiger Mono-facial All Black 360-380 Watt

Tiling Ribbon (TR) Technology

Positive power tolerance of 0~+3%

ISO9001:2015, ISO14001:2015, ISO45001:2018  
certified factory

IEC61215, IEC61730 certified product

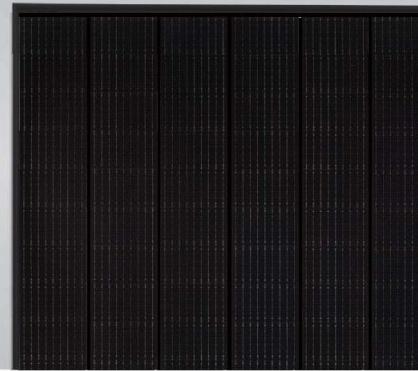

## KEY FEATURES



### TR technology + Half Cell

TR technology with Half cell aims to eliminate the cell gap to increase module efficiency (mono-facial up to 19.91%)



### 9BB instead of 5BB

9BB technology decreases the distance between bus bars and finger grid line which is benefit to power increase.



### Higher lifetime Power Yield

2.5% first year degradation, 0.6% linear degradation



### Best Warranty

12 year product warranty, 25 year linear power warranty



### Avoid debris, cracks and broken gate risk effectively

9BB technology using circular ribbon that could avoid debris, cracks and broken gate risk effectively




### Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




## LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty 25 Year Linear Power Warranty  
0.6% Annual Degradation Over 25 years

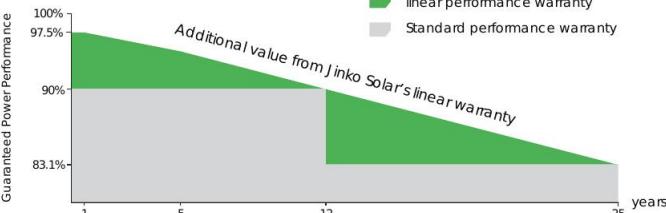


**Jinko** Solar  
Building Your Trust in Solar

## Engineering Drawings

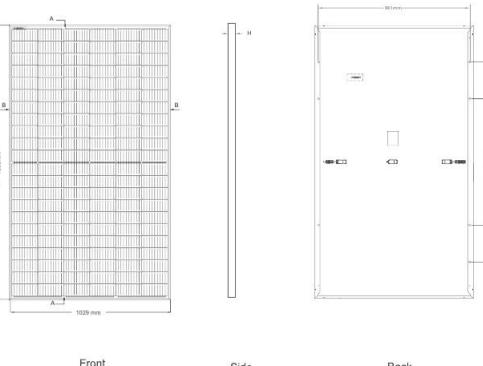

## Electrical Performance & Temperature Dependence

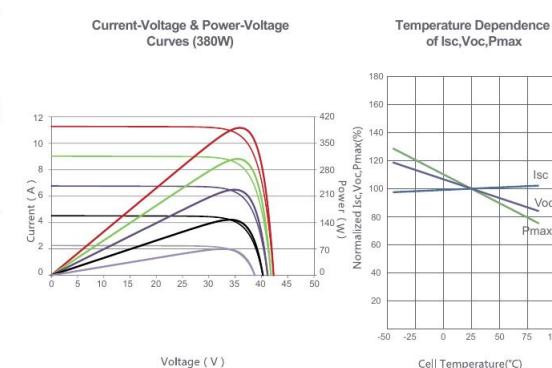

## Mechanical Characteristics

Cell Type	P type Mono-crystalline
No.of cells	132 (2×66)
Dimensions	1855×1029×30mm (73.03×40.51×1.18 inch)
Weight	20.8 kg (45.86 lbs)
Front Glass	3.2mm,Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TUV 1×4.0mm <sup>2</sup> (+):290mm, (-):145 mm or Customized Length

## SPECIFICATIONS

Module Type	JKM360M-6RL3-B	JKM365M-6RL3-B	JKM370M-6RL3-B	JKM375M-6RL3-B	JKM380M-6RL3-B	STC	NOCT
Maximum Power (Pmax)	360Wp	268Wp	365Wp	272Wp	370Wp	275Wp	375Wp
Maximum Power Voltage (Vmp)	36.51V	33.27V	36.61V	33.36V	36.71V	33.49V	36.80V
Maximum Power Current (Imp)	9.86A	8.05A	9.97A	8.14A	10.08A	8.22A	10.19A
Open-circuit Voltage (Voc)	43.82V	41.36V	43.92V	41.45V	44.02V	41.55V	44.12V
Short-circuit Current (Isc)	10.68A	8.63A	10.79A	8.71A	10.90A	8.80A	11.01A
Module Efficiency STC (%)	18.86%	19.12%	19.38%	19.65%	19.91%	18.86%	19.12%
Operating Temperature(°C)						-40°C~+85°C	
Maximum system voltage						1000VDC (IEC)	
Maximum series fuse rating						20A	
Power tolerance						0~+3%	
Temperature coefficients of Pmax						-0.35%/°C	
Temperature coefficients of Voc						-0.28%/°C	
Temperature coefficients of Isc						0.048%/°C	
Nominal operating cell temperature (NOCT)						45±2°C	

\* STC: Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

\* Power measurement tolerance: ± 3%

The company reserves the final right for explanation on any of the information presented hereby. TR JKM360-380M-6RL3-B-A1.1-EN

**VANTAGE**  
HOME SOLAR

## CONTRACTOR

VANTAGE HOME SOLAR, LLC

PHONE: (833) 473-3611

ADDRESS: 3600 NEW JERSEY 66, UNIT 150  
NONE NEPTUNE CITY, NJ 07753

LIC.NO.: HIC:13VH09715800

HIC.NO.:

ELE.NO.:

UNAUTHORIZED USE OF THIS  
DRAWING SET WITHOUT WRITTEN  
PERMISSION FROM CONTRACTOR IS IN  
VIOLATION OF U.S. COPYRIGHT LAWS  
AND WILL BE SUBJECT TO CIVIL  
DAMAGES AND PROSECUTIONS.

NEW PV SYSTEM: 12,750 KWP

# BARONE RESIDENCE

31 SCUDDERS ROAD  
SPARTA TOWNSHIP,  
NJ 07871  
APN: 1826001000000004

## ENGINEER OF RECORD

PAPER SIZE: 11" x 17" (ANSI B)

## RESOURCE DOCUMENT

DATE: 2024-01-22

DESIGN BY: A. SHAPOVALENKO

CHECKED BY: UKRDRAFTING

## REVISIONS

R-001

(SHEET 4)